INSTALLATION INSTRUCTIONS

Item#1545 (New. 08/29/2013)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (A) to the outlet box using two mounting screws (B) (Size: #8-32N*L0.5"). The side of the mounting plate marked "GND" must face out.
4. Place threaded rod (H) onto fixture body (I) and place metal tube (G) over the threaded rod (H), then place the nut (N1) over the metal tube (G) and carefully pull the fixture's wire through the nut.
5. Determine the desired length and thread the rods (F) and nipple 1 to nut (N1), fasten the nut (N2) and nipple 2 to the end of rods (F), then secure the loop (E) to the end of rods (F).
6. By measuring, determine correct number of links needed for proper hanging height. Using a pair of chain pliers, disconnect and discard remaining chain. Then attach the chain to loop (E) and the loop on canopy (D). Carefully lace the fixture wires through the chain, loop (E) and the loop on canopy (D)**.**

CONNECTING THE WIRES (Fig. 2)

7. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.

FINISHING THE INSTALLATION (Fig. 1)

8. Place canopy (D) over the mounting plate (A) and secure with screws (C).
9. Place the glass shades (J) and metal rings (M) over the socket and secure with socket rings (K) by using spanner (L) provided.
10. Install the light bulb(s) (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

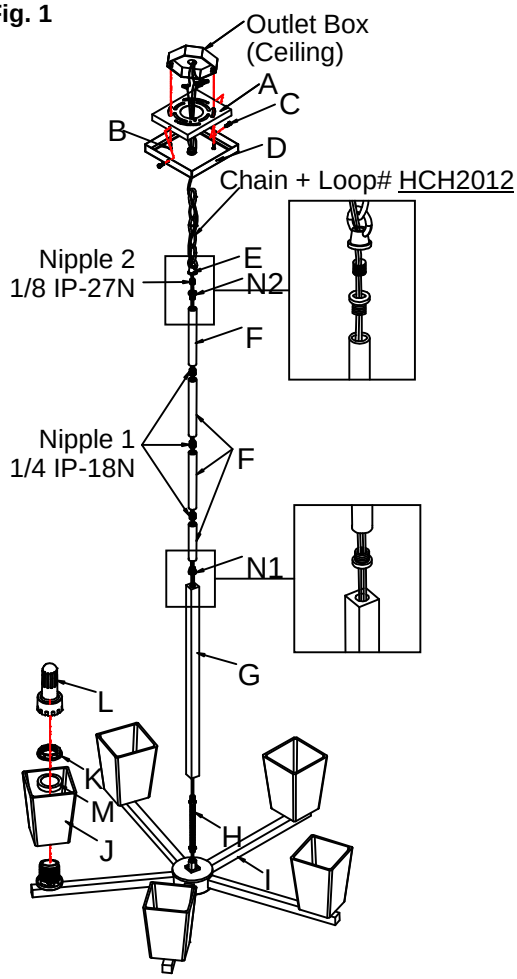

Rod# W35-1*3(F)
W35-H*1(F)

Spanner # WRH-T1-51

Socket Ring # SKT-RING-26

Set# A-021-126102
- Mounting Plate
- Ground Screw
- Mounting Screw*2

Fig. 2

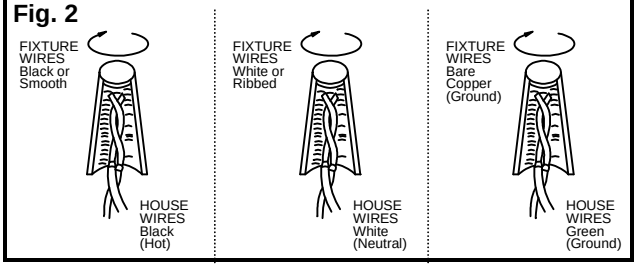
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green (Ground)

Notice: It is important to use proper chain pliers (not included)
To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

Intertek

american lighting association

LA-1832E